NØK BASKETBALL


Unit 6 · Proposed layout, Option A

SCHEMATIC FOR DISCUSSION
Not for construction · Rev 4 · 21 Oct 2026


UPPER LEVEL
deck at +10 ft 4 in

GROUND
front block

THE HALL
one main court, or two training courts at once

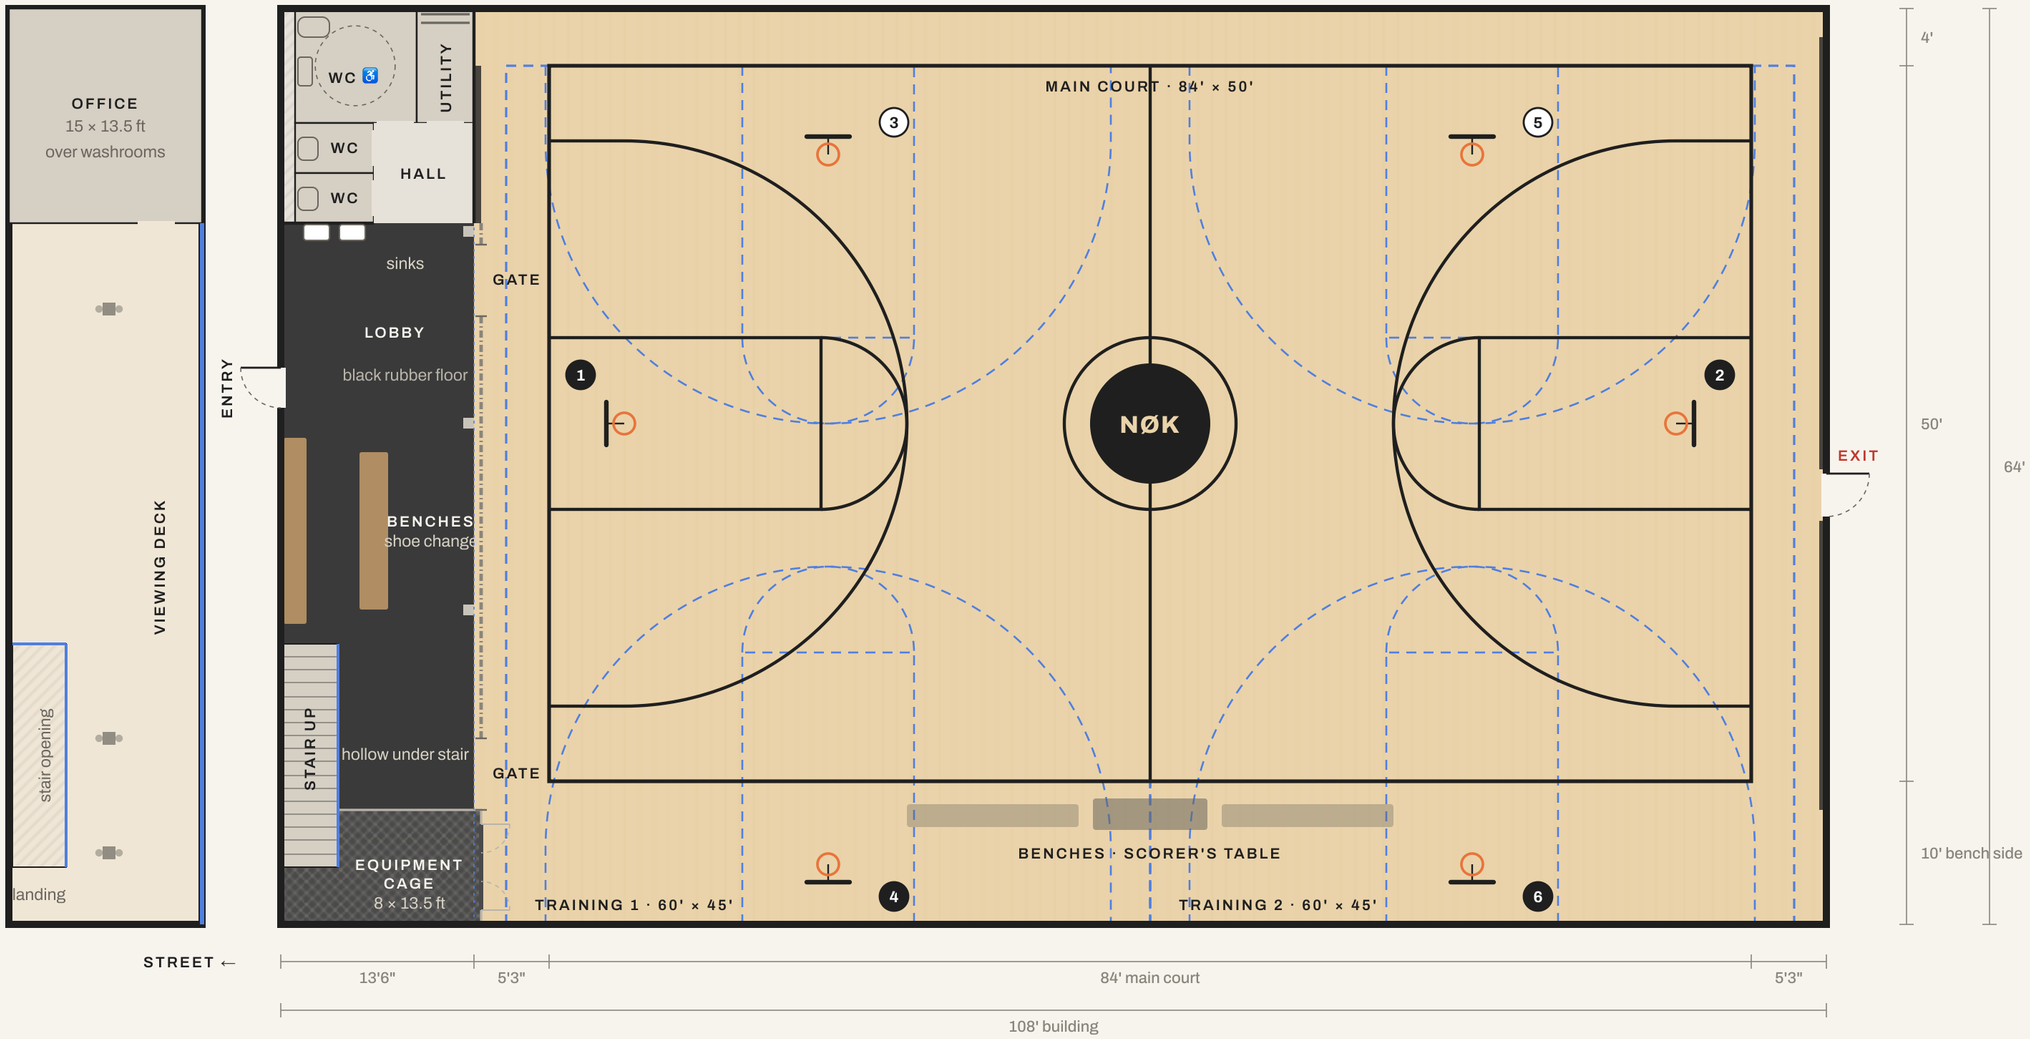

LONG SECTION
Street on the left

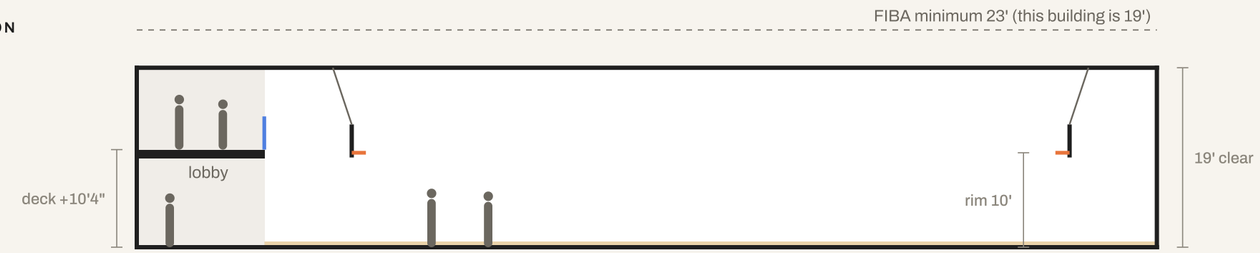

AT A GLANCE

6,912 sq ft
64' × 108', 19' clear height

84' × 50'
main court, AAU size, 5'3" end runouts

2 × 60' × 45'
cross-court training courts

6 hoops
2 main, 4 on the side walls

3 washrooms
1 universal (8.5' × 8'), 2 stalls, office above

~50 people
on the viewing deck

KEY

- Main court lines
- Training court lines
- 3 — Hoop, fixed
- 3 — Hoop, folds (if it clears 19')
- Wall padding
- Glass guard at deck edge
- Black rubber floor, deck above
- Plumbing chase, 1 ft
- Chain-link divider, 4 ft

Building dimensions from a site measure on 28 Jun 2026, approximate. Confirm with a laser survey before any order.

19' clear height: built for training, academy, rec and league play. Not a FIBA-sanctioned venue (needs 23').

No gravity drain at the front: washrooms pump to the main. Ejector pit location TBC, likely the utility closet.

Rear exit near the middle of the back wall, beside hoop 2. Bay door removed.

Floor, lights and hoop mounts not yet selected. Architect to design.

Hoop 1 hangs off the deck edge beam and column; engineer to design the frame.