NØK BASKETBALL


Unit 6 · Proposed layout, Option A

SCHEMATIC FOR DISCUSSION
Not for construction · Rev 3 · 20 Oct 2026


UPPER LEVEL
deck at +10 ft 4 in

GROUND
front block

THE HALL
one main court, or two training courts at once

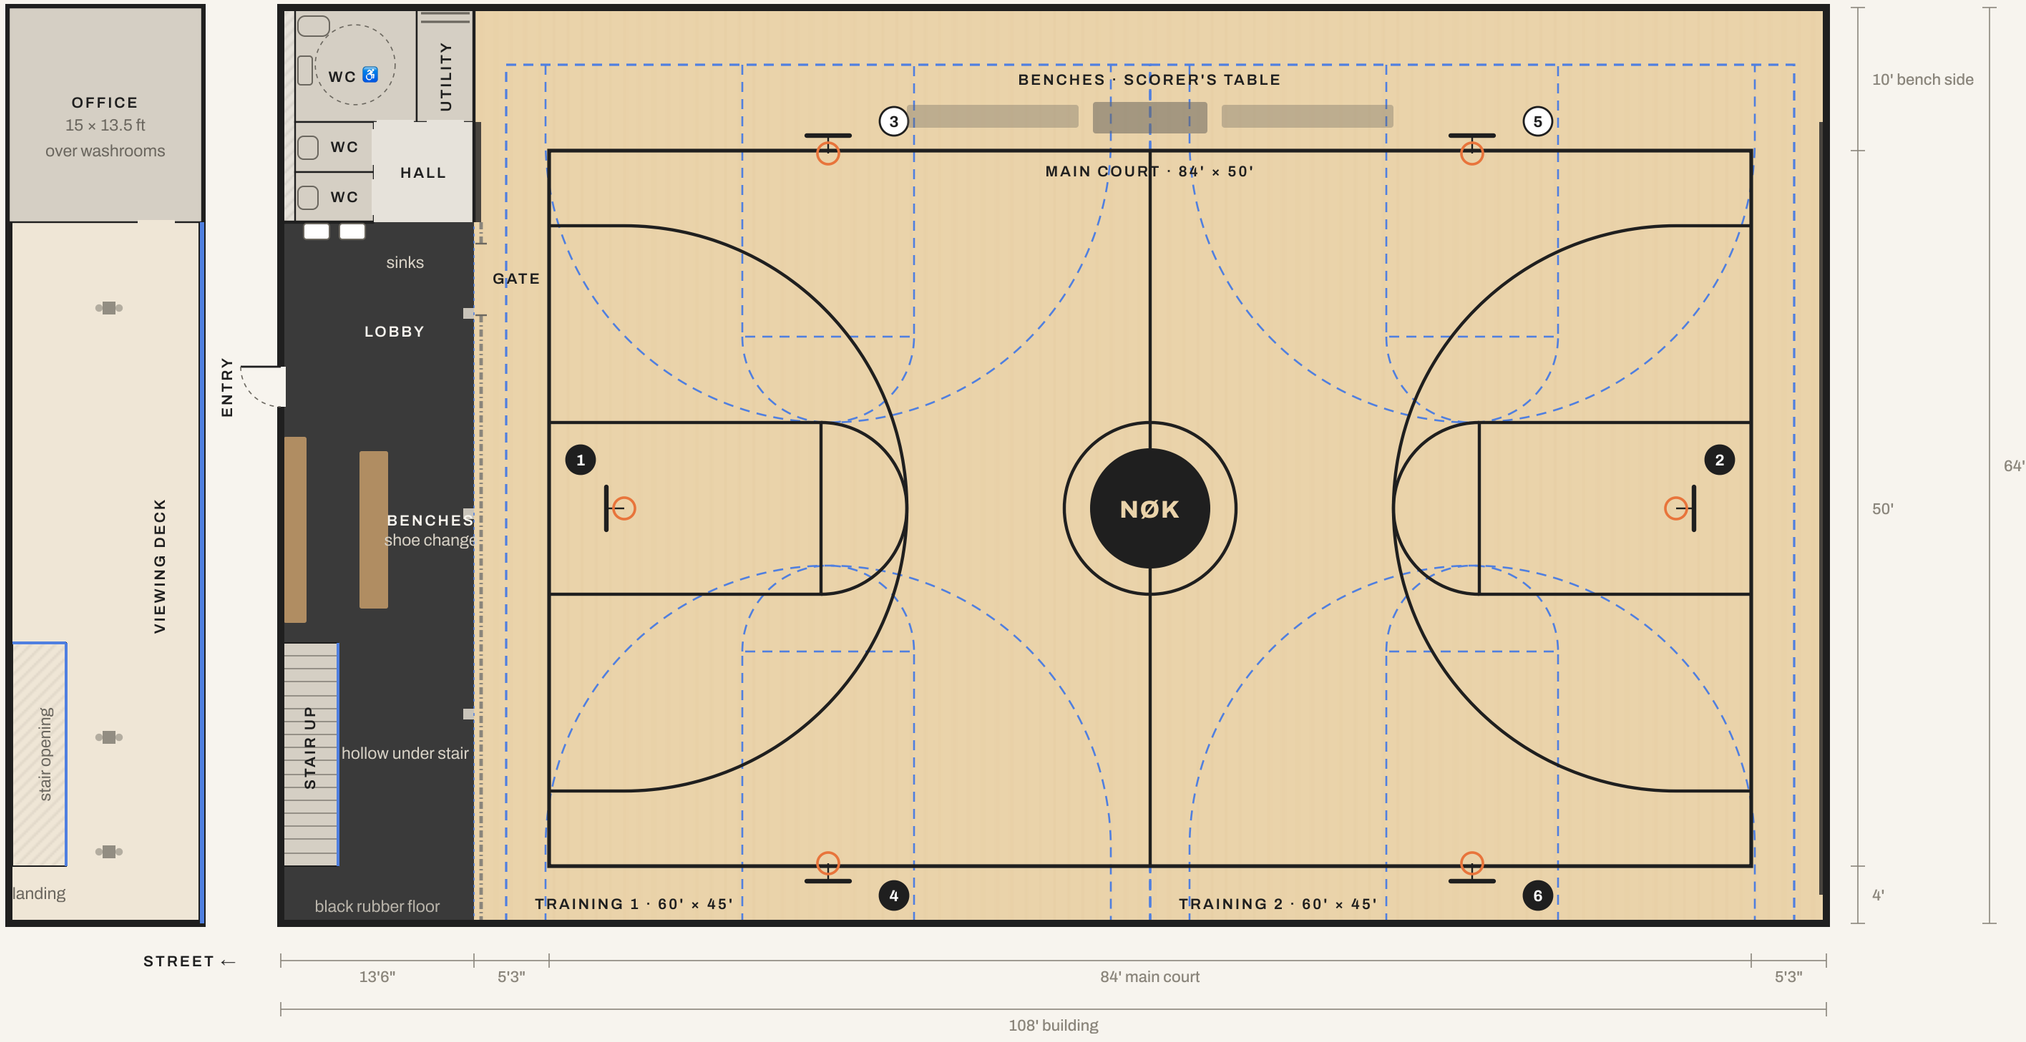

LONG SECTION
Street on the left

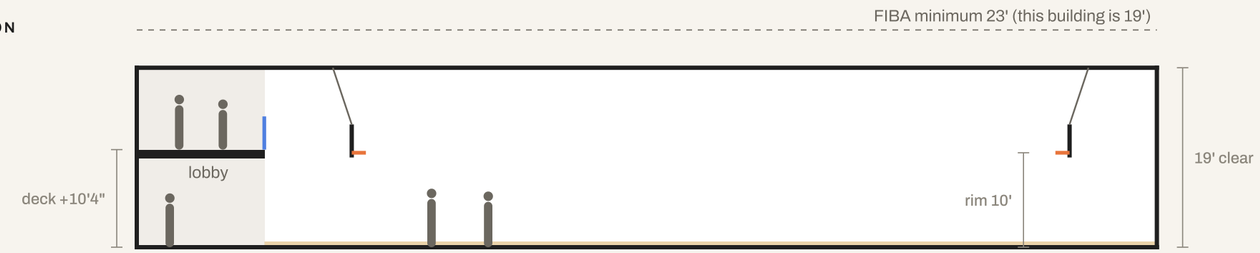

AT A GLANCE

6,912 sq ft
64' × 108', 19' clear height

84' × 50'
main court, AAU size, 5'3" end runouts

2 × 60' × 45'
cross-court training courts

6 hoops
2 main, 4 on the side walls

3 washrooms
1 universal (8.5' × 8'), 2 stalls, office above

~50 people
on the viewing deck

KEY

- Main court lines
- Training court lines
- 3 — Hoop, fixed
- 3 — Hoop, folds (if it clears 19')
- Wall padding
- Glass guard at deck edge
- Black rubber floor, deck above
- Plumbing chase, 1 ft
- Chain-link divider, 4 ft

Building dimensions from a site measure on 28 Jun 2026, approximate. Confirm with a laser survey before any order.

19' clear height: built for training, academy, rec and league play. Not a FIBA-sanctioned venue (needs 23').

No gravity drain at the front: washrooms pump to the main. Ejector pit location TBC, likely the utility closet.

Bay door removed; street wall is solid. Entry door about 25' from the corner.

Floor, lights and hoop mounts not yet selected. Architect to design.

Hoop 1 hangs off the deck edge beam and column; engineer to design the frame.